



PLAN (ROOF PANELS)

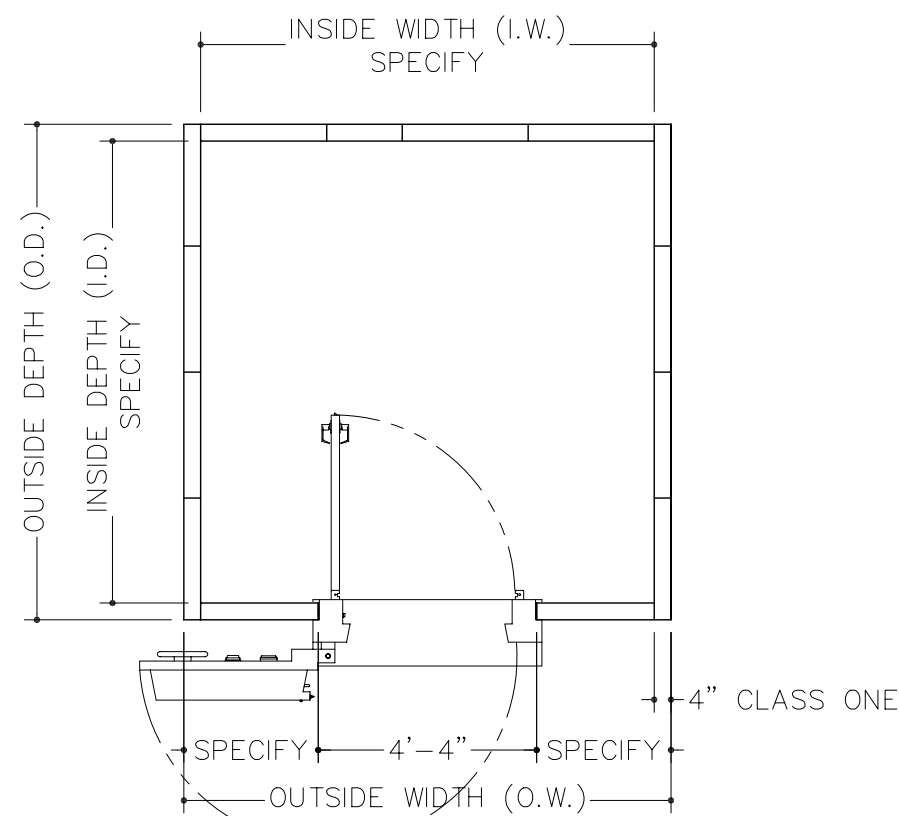

PLAN (WALLS PANELS)

MODEL 211, U.L. CLASS 1 PANELS SHOWN
 MODEL 101-01, U.L. CLASS 1, LEFT SWING DOOR SHOWN

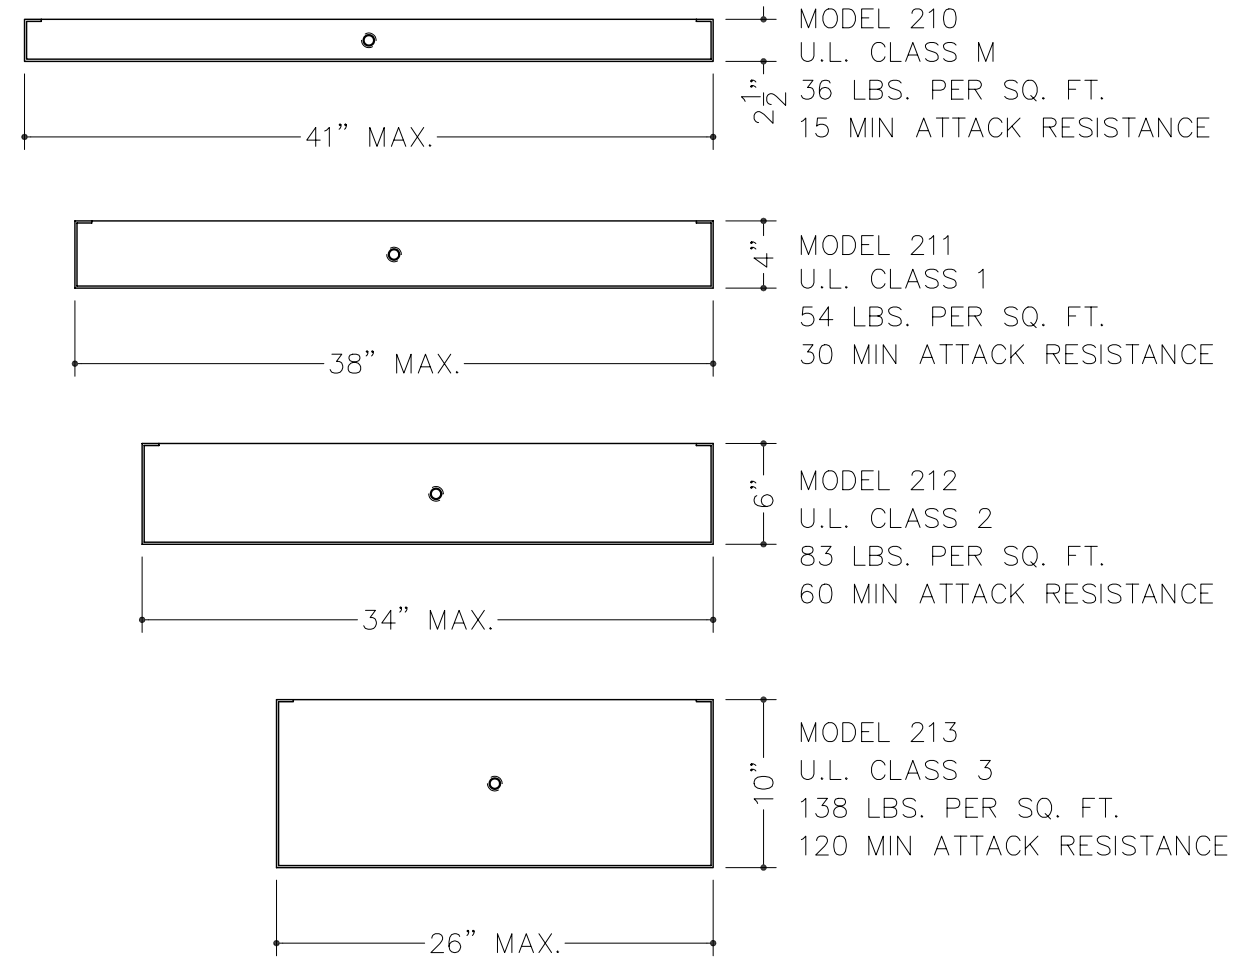


CAUTION !
PRIOR TO INSTALLATION READ VAULT PANEL INSTALLATION PROCEDURES AND VAULT DOOR INSTALLATION MANUAL PROVIDED. ONLY PROFESSIONALS EXPERIENCED AND QUALIFIED IN THE INSTALLATION OF MODULAR VAULTS AND VAULT DOORS SHOULD INSTALL THIS PRODUCT.

- NOTES:
- PANELS ARE CONSTRUCTED OF FIBER REINFORCED CONCRETE AND REBAR IN A FIVE-SIDED STEEL PAN. STEEL PAN FORMS INTERIOR OF VAULT WITH EXPOSED CONCRETE ON EXTERIOR.
 - ALL INSIDE ADJOINING SURFACES TO BE WELDED WITH 1" OF 1/8" WELD PER EACH FOOT OF LENGTH.
 - ALL UTILITY CONNECTIONS ARE BY OTHERS.
 - STRUCTURAL DESIGN OF FLOOR AND SUPPORTING FOUNDATION IS BY OTHERS.
 - SEISMIC CALCULATIONS (IF APPLICABLE) ARE BY OTHERS.
 - PANELS ARE SHIPPED "KNOCK-DOWN" TO BE ERECTED AT JOBSITE AS PER SPEC'S FURNISHED.
 - WHERE APPLICABLE, FLOOR, CEILING, & WALL COVERINGS ARE BY OTHERS. APPROPRIATE UNDERLAYMENT MATERIAL APPLIED PRIOR TO FINAL FLOOR COVERING MAY BE REQUIRED FOR A SMOOTH FLOOR ON INSTALLATIONS THAT INCLUDE FLOOR PANELS.
 - ALL DIMENSIONS ARE NOMINAL. TOLERANCES OF 1/32" PER FOOT OF LENGTH ARE TO BE ALLOWED.
 - THIS STRUCTURE IS NOT DESIGNED FOR ADDITIONAL LOADS APPLIED TO THE ROOF.
 - ELECTRICIAN IS TO INSTALL 120 V, 10 AMP DUPLEX OUTLET ABOVE VAULT DOOR FOR VENTILATOR SUPPLY.
 - IT IS THE RESPONSIBILITY OF THE OWNER/ARCHITECT/GC TO ENSURE THAT ALL LOCAL, STATE & FEDERAL ADA REGULATIONS ARE COMPLIED WITH.
 - PANELS ARE CAST WITH LIFT POINTS EACH END. REQUEST (P/N 9040-0002) 3/4" T-12 LIFTING SWIVEL AND (P/N 9040-0006) 3/4"x4" COIL BOLT FOR PROPER RIGGING ATTACHMENT.
 - VAULT DOOR REQUIRES INSTALL KIT FOR PROPER INSTALLATION. REQUEST KIT P/N 102-2200.

WHEN SPECIFYING VAULT PROVIDE THE FOLLOWING:

- U.L. CLASS (M, 1, 2, 3)
- NUMBER OF SIDES (5, 6)
- INSIDE DIMENSIONS (WIDTH x DEPTH x HEIGHT)
- VAULT DOOR LOCATION
- HVAC PORT LOCATION (IF APPLICABLE)

EXAMPLE:
 CLASS 1, 5 SIDED, 9'-0" D x 12'-0" D x 8'-6" H)
 L.S. DOOR CENTERED ON 9'-0" WALL

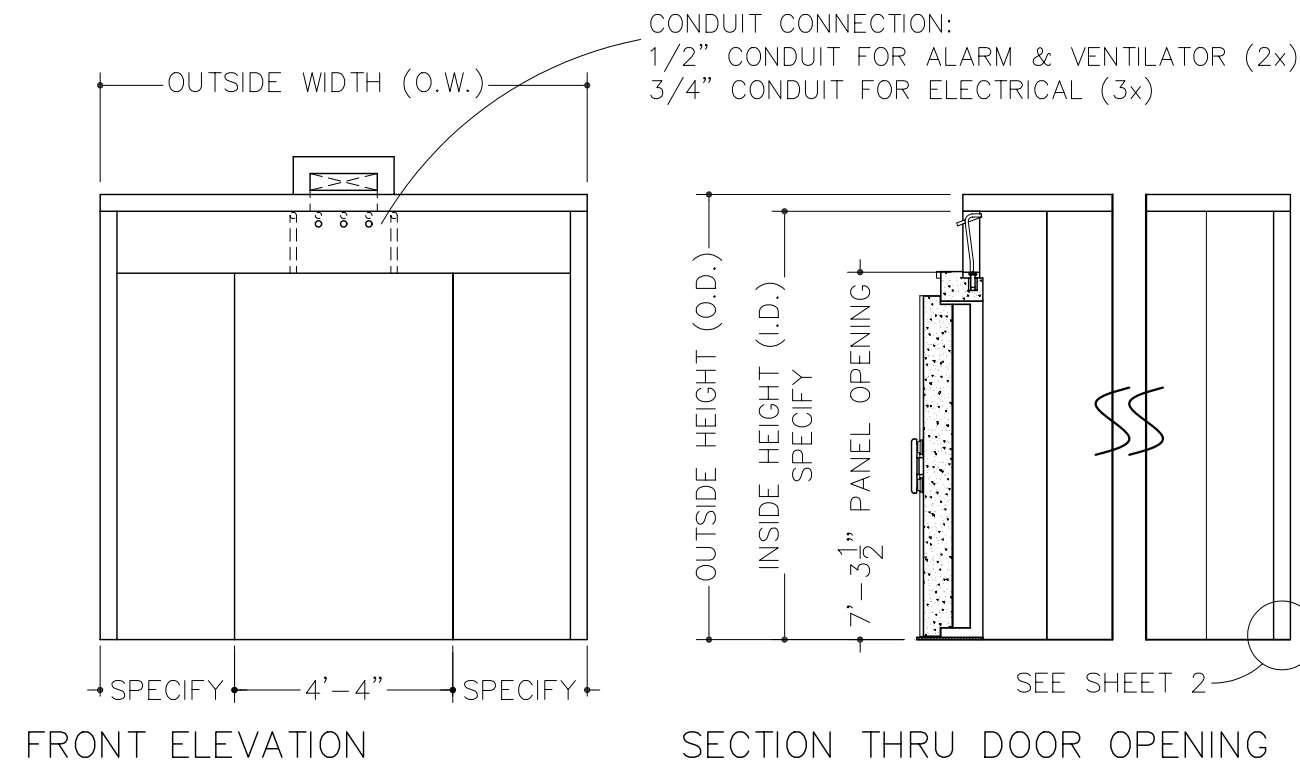

FRONT ELEVATION

SECTION THRU DOOR OPENING


DO NOT SCALE




American Vault.us

PRODUCT APPLICATION DRAWING
 210 SERIES BURGLARY RESISTANT
 MODULAR VAULT PANELS


SIZE	DWG NO	DATE	SHEET
B	20155	01.01.2012	1 OF 2

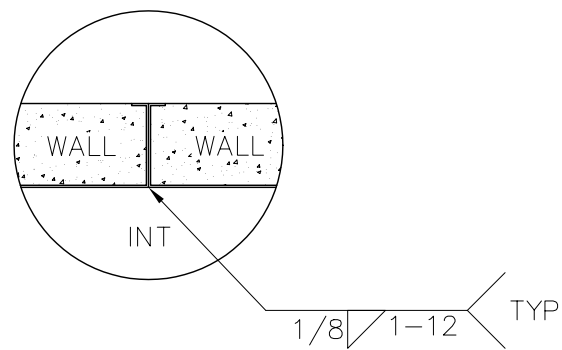


WALL TO WALL CONNECTION

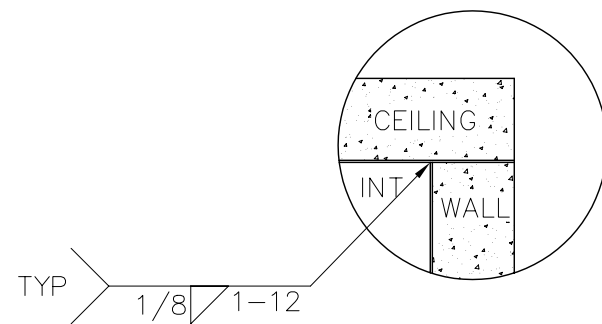


WALL TO CEILING CONNECTION

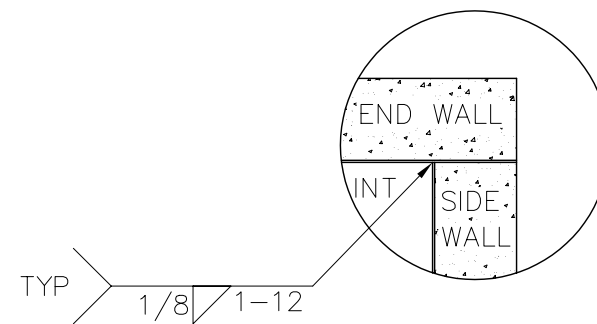

WALL TO WALL CORNER CONNECTION

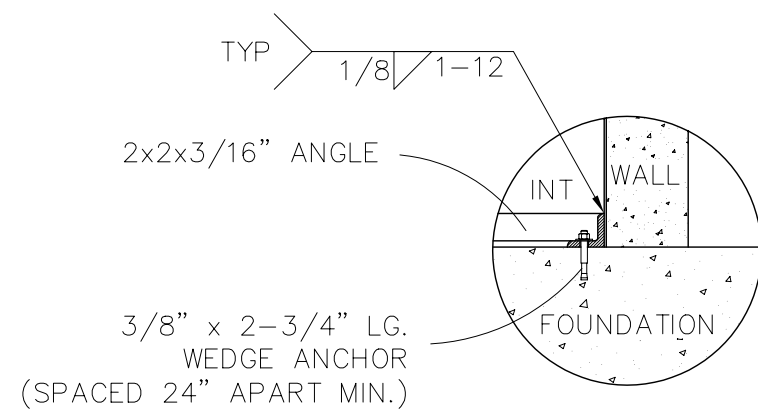

WALL TO FOUNDATION CONNECTION
FIVE SIDED VAULT

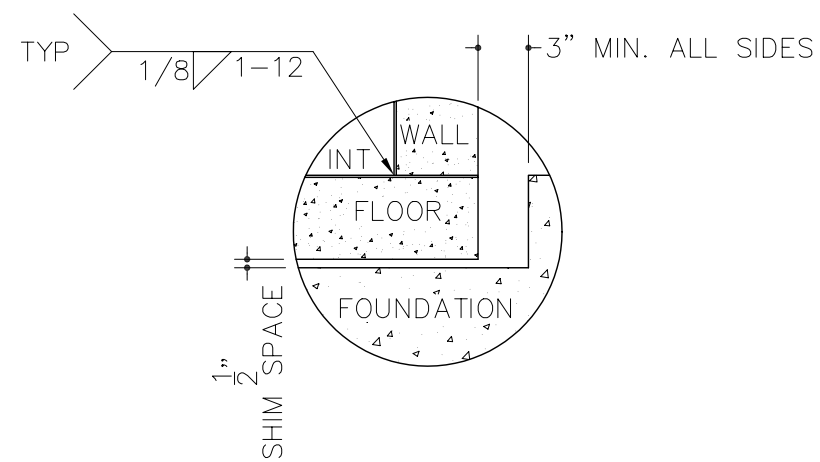

WALL TO FLOOR CONNECTION
SIX SIDED VAULT WITH PIT

DO NOT SCALE



American
vault.us

PRODUCT APPLICATION DRAWING
210 SERIES BURGLARY RESISTANT
MODULAR VAULT PANELS

SIZE	DWG NO	DATE	SHEET
B	20155	01.01.2012	2 OF 2